


Optical Fibre Micro Bundle

For High Temperature up to + 200°C

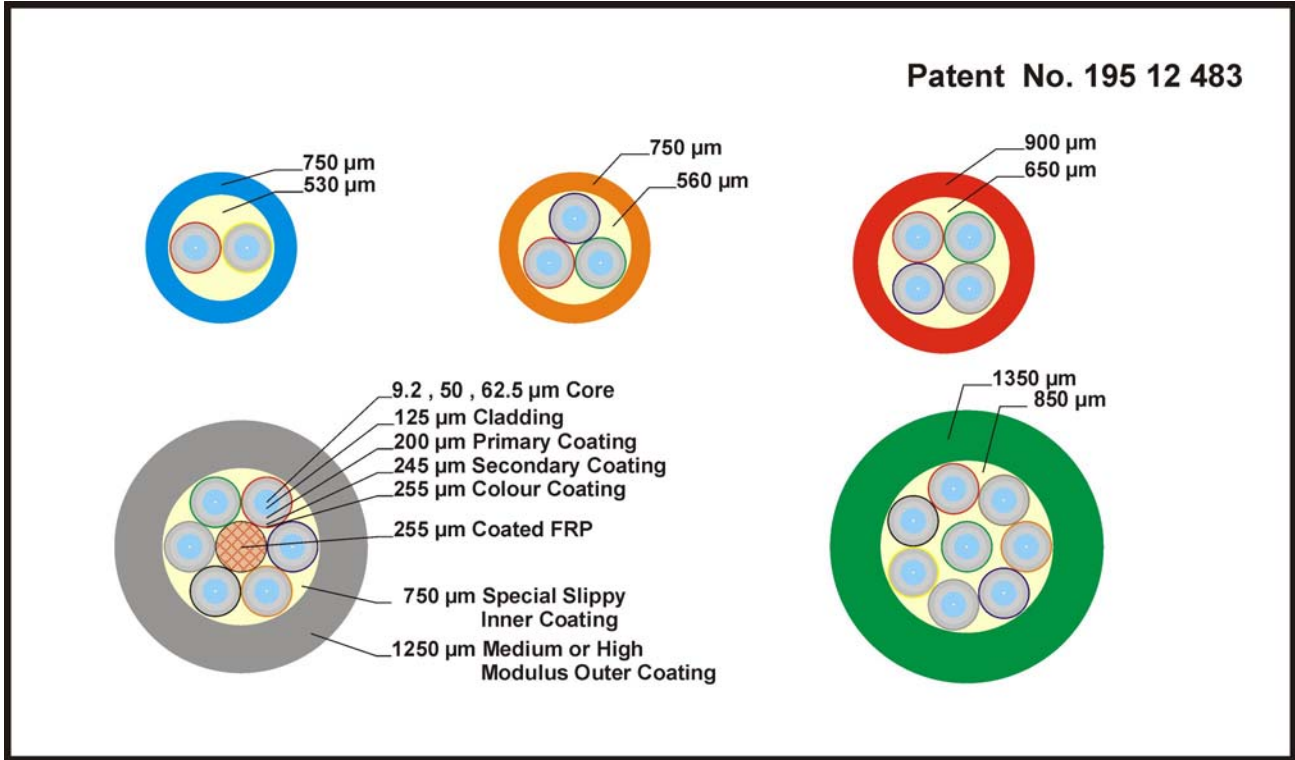

- UV cured system.
- Uniform bubble free coating layers.
- Modulus of final coating layer up to 1000 MPa.
- Compact and flexible with small bending radius.
- Halogen- and gel-free.
- Dimensional stability with tight tolerance in axial and radial directions.
- Online X-Y diameter and adjustable tension control measurements.
- Versatile customized manufacturing.
- Variety of finishes, depending on coefficient of friction required.
- Chemical resistance to filling compounds.
- Water and abrasion resistance of final coating layer.
- Suitable for use in LAN construction for direct termination (FTTD) and in loose tube.
- Capacity of 200,000 kms per year in multi and single mode fibres.
- Short and long lengths per spool.
- OTDR measurements show no significant attenuation increase for multi and single mode fibres tested under zero tension at temperatures between -60 °C and +85 °C.